



Reliable · Economical · Innovative



Ex LED Linear Luminaire
for particular industrial requirements

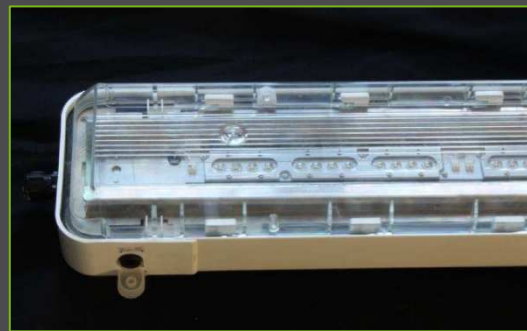

- 
- 30 / 60 / 75 Watt
 - Surface explosion and dust protection
 - Extremely sturdy design
 - Ambient temperature range:
 $-20^{\circ}\text{C} \leq T_a \leq +40^{\circ}\text{C}$ (also with throughwiring)
 - Luminaire cover polycarbonate (PC),
UV-stabilized
 - EU type examination certificate:
IBExU20ATEX1012 | Edition 0
 - Degree of enclosure protection: min. IP 64
 - **Ex** II 2G Ex db eb op is IIC T5 Gb
 - **Ex** II 2G Ex db eb op is IIB T5 Gb
 - **Ex** II 2D Ex tb op is IIC T 100 °C Db

Subject to technical modifications!